

AMC-E Series IP+SDI HD PTZ Camera




AMC-E220N
AMC-E200N


Features

- H.265 video compression, dual stream;
- Compatible with ONVIF, RTSP, RTMP protocols;
- With OSD menu, support image flip;
- Come with IR remote controller;
- Support standard VISCA & Pelco communication protocols;
- RS232 in & RS232 out / RS485 control interface, support daisy chain;
- Special mechanical PTZ driving system, ensure precise positioning.

Dimensions

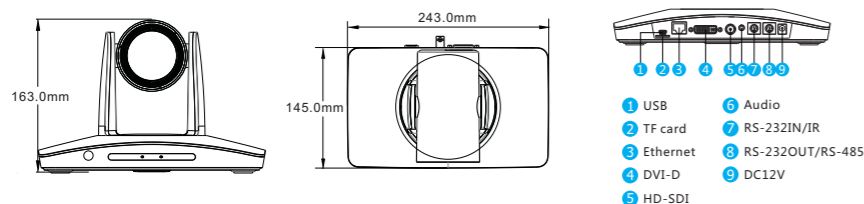

Accessories

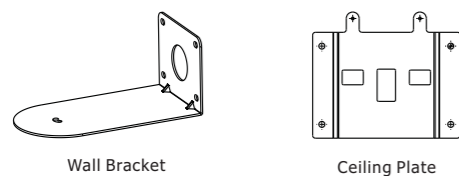

Technical Data

Model	AMC-E220N	AMC-E200N
Image Sensor	1/2.8" Exmor CMOS, 2.14MP	
Video Standard (HD)	1080p/60, 1080p/30, 1080i/60, 720p/60 1080p/50, 1080p/25, 1080i/50, 720p/50	
Focal	4.7mm - 94.0mm	3.9mm - 46.8mm
Iris	F1.6 - F3.5	F1.6 - F2.8
Optical Zoom	20X	12X
Digital Zoom	12X	
Field of View	59.5° - 2.9°	72.5° - 6.3°
Focus	Auto, Manual, PTZ Trigger AF, One Push	
Minimum Illumination	0.5Lux (Color), 0.1Lux (B/W)	
Shutter Speed	1/1 ~ 1/10,000s	
AGC	Auto / Manual	
White Balance	Auto, Indoor, Outdoor, One Push, Manual, Auto Track	
AE Control	Auto, Manual, Shutter Priority, Iris Priority, Intelligence	
Pan & Tilt		
Pan Range	-170° ~ +170°	
Tilt Range	-30° ~ +90°	
Pan Speed	0.1° ~ 120°/ s	
Tilt Speed	0.1° ~ 80°/ s	
Preset Number	256	
OSD	Yes	
Image Flip	Yes	
Network		
Max. Image Size	1920 x 1080	
Frame Rate	HD: 50Hz: 50fps(1920x1080) 60Hz: 60fps(1920x1080)	
Video Compression	H.265, H.264	
Audio Compression	AAC	
Protocol	HTTP, RTSP, RTMP, RTP, TCP, UDP, ONVIF	
Dual Stream	Support	
Simultaneous Users	Up to 10 users	
Interface		
Video Output(HD)	DVI-D, 3G-SDI	
Audio	1 way line in; 1 way line out	
Ethernet	RJ45, 100M	
USB	1 way USB	
Local Storage	TF card, up to 64GB	
Control Interface	RS-232IN/IR, RS-232OUT/RS-485	
General		
Control Protocol	VISCA and Support Daisy Chain, PELCO-D, PELCO-P	
Address	0 ~ 63	
Power Supply	DC12V	
Working Temperature	0°C ~ +40°C	
Storage Temperature	-20°C ~ +60°C	
Dimension	243mm x 145mm x 163mm	
Weight	1.2KG	
Body Color	Grey	