ZC4 Series
IP+ SDI Integrated Camera

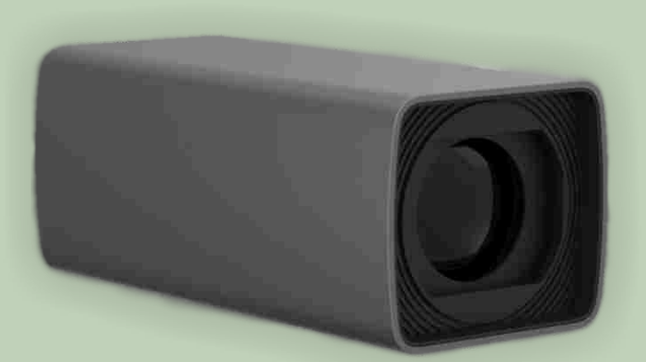

ZC4-A2001NV2

Features

- 2.14MP, 1/2.8" CMOS;
- Support various HD video formats;
- H.265 video compression, dual stream;
- 3G-SDI output interface;
- 20x optical zoom, 12x digital zoom;
- With OSD menu;
- With RS485 & RS232 control interfaces;
- Has image flip function.

Dimensions

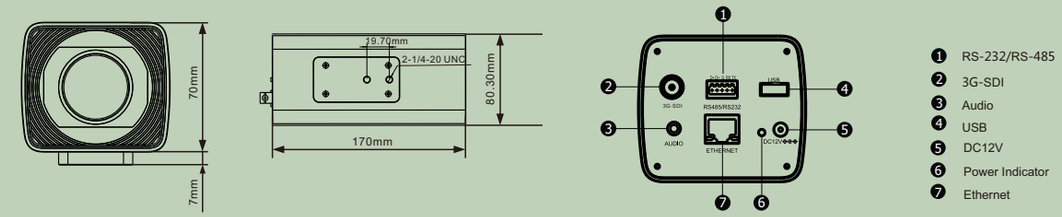

Accessories



Wall Bracket

Technical Data

Model	ZC4-A2001NV2
Camera	
Image Sensor	1/2.8" Exmor CMOS, 2.14MP
HD Signal Format	1080P60, 1080P50, 1080P30, 1080P25, 1080I60, 1080I50, 720P60, 720P50
Focal	f=4.7 - 94.0mm
Iris	F=1.6 - F3.5
Optical Zoom	20X
Digital Zoom	12X
Min. Illumination	0.5Lux(color), 0.1Lux(B/W)
WDR	Yes
Field of View	59.5° - 2.9°
Focus	Auto, Manual, One Push
Shutter Speed	1/1~1/10,000s
AGC	Auto / Manual
White Balance	Auto, Indoor, Outdoor, One Push, Manual, Auto Track
AE Control	Auto, Manual, Shutter Priority, Iris Priority
BLC	Yes
S/N Radio	≥50dB
NoiseReduction	2D / 3D
Preset Number	256
OSD	Yes
Image Flip	Yes
Network	
Max. Image Size	1920 x 1080@60fps
Video Compression	H.265, H.264
Audio Compression	AAC
Protocol	HTTP / RTP / TCP / UDP / ONVIF / RTSP / RTMP
Dual Stream	Support
Simultaneous Users	Up to 10 Users
Interface	
Ethernet	Rj45, 100M
Video Output	3G-SDI
Control Interface	RS485, RS232
General	
Control Protocol	VISCA, PELCO-D, PELCO-P
Address	1~7(VISCA), 0~255(PELCO-D / PELCO-P)
Power Supply	DC12V, optional POE
Power Consumption	<15W
Work Temperature	0°C ~ +40°C
Storage Temperature	-20°C ~ +60°C
Dimension (L×W×H)	170mm x 80mm x 70mm
Net Weight	0.83kg
Body Color	Grey