

AMC-E Series USB2.0/3.0 HD PTZ Camera




AMC-E200U3


Features

- Up to 72.5° FOV;
- USB 3.0 interface, raw data output;
- Support standard UVC protocol;
- Up to 1080p60 HD video format;
- Up to 12x optical zoom, 12x digital zoom;
- Come with IR remote controller;
- With OSD menu, supports image flip;
- Provide an extra DVI-D video interface(only for AMC-E200U3);
- Support standard VISCA & Pelco communication protocols;
- RS232IN/IR & RS232OUT/RS485 control interface, support daisy chain;
- Special mechanical PTZ driving system, ensure precise positioning.


Dimensions

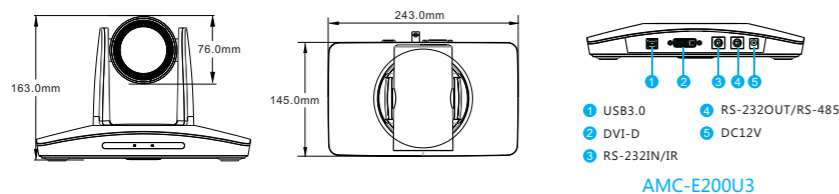

Accessories

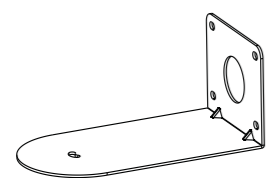

Wall Bracket



Ceiling Plate

Technical Data

Model	AMC-E200U3
Image Sensor	1/2.8" Exmor CMOS, 2.14MP
Resolution	1920x1080P/60/50/30/25/20/15/10/5 1280x720P/60/50/30/25/20/15/10/5 1024x768P/60/50/30/25/20/15/10/5 800x600P/60/50/30/25/20/15/10/5 640x480P/60/50/30/25/20/15/10/5
Focal	3.9mm - 46.8mm
Iris	F1.6 - F2.8
Optical Zoom	12X
Digital Zoom	12X
Field of View	72.5° - 6.3°
Focus	Auto, Manual, PTZ Trigger AF, One Push
Minimum Illumination	0.5Lux
Shutter Speed	1/1 - 1/10,000s
AGC	Auto / Manual
White Balance	Auto, Indoor, Outdoor, One Push, Manual, Automatic Tracking, Sodium, Fluorescent
AE Control	Auto, Manual, Shutter Priority, Iris Priority, Intelligence
BLC	Yes
WDR	Yes
Noise Reduction	2D / 3D
Pan & Tilt	
Pan Range	-170° ~ +170°
Tilt Range	-30° ~ +90°
Pan Speed	0.1° ~ 120°/s
Tilt Speed	0.1° ~ 80°/s
Preset Number	256
OSD	Yes
Image Flip	Yes
Interface	
Video Output	USB3.0, DVI-D
Control Interface	USB3.0, RS-232IN/IR, RS-232OUT/RS-485
General	
Control Protocol	VISCA and Support Daisy Chain, PELCO-D, PELCO-P
Address	0-63
Power Supply	DC12V
Dimension	243mm x 145mm x 163mm
Weight	1.2KG
Body Color	Grey