

USB Lecturer Tracking PTZ Camera



LTC2-A1202





BLS-200

Features


- USB3.0 Output
- Precise lock and track capability
- Unmanned and standalone tracking
- Smart tracking performance
- Board writing triggers tracking
- Easy connection, configuration and communication

Dimensions

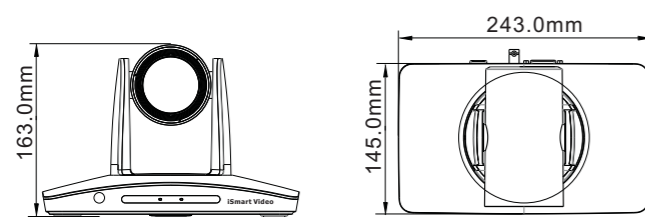

- 1 Audio
- 2 TF Card
- 3 Ethernet
- 4 DVI-D
- 5 3G-SDI
- 6 RS-232/RS-485
- 7 USB3.0
- 8 DC12V

Accessories



Wall Bracket

Technical Data

Model	LTC2-A1202
Tracking Camera	
Image Sensor	1/2.8" Exmor CMOS, 2.14MP
Lens	f=3.9mm - 46.8mm; F1.6 - F2.8
Zoom	Optical: 12X; Digital: 12X
Field of View	72.5° - 6.3°
Focus	Auto, Manual, PTZ Trigger AF, One Push
Min. Illumination	0.5 lux (Color), 0.1lux (B/W)
Shutter Speed	1/1 - 1/10,000s
Gain	Auto / Manual
White Balance	Auto, Indoor, Outdoor, One Push, Manual, Automatic Tracking
AE Control	Auto, Manual, Shutter Priority, Iris Priority
Full View Camera	
Image Sensor	1/2.8" Exmor CMOS
Effective Pixel	2.14MP
White Balance	Auto
Exposure	Auto
Field of View	Horizontal: 86° ; Vertical: 52°
Lens	2.4mm
PTZ	
Pan/Tilt Angle	Pan: -170° ~ +170°; Tilt: -30° ~ +90°
Pan/Tilt Speed	Pan: 0.1° ~ 120°/s; Tilt: 0.1° ~ 90°/s
Preset Number	256
Control Interface	RS-232 / RS-485 / USB3.0
Ethernet	RJ45, 100M
Control Protocol	PELCO-D / VISCA / UVC
Network	
Image Resolution	1920 * 1080@60fps
Video Format	1080P60 / 1080P50 / 1080P30 / 1080P25 1080I60 / 1080I50 / 720P60 / 720P50
Video Compression	H.264
Audio Compression	AAC
Network Protocol	ONVIF / RTSP / RTMP / TCP / UDP
Simultaneous Users	Up to 10 users
Dual Stream	Support
Video Interface	3G-SDI / DVI-D / USB3.0
General	
Power Supply	DC12V
Power Consumption	<20W
Working Temperature	0°C ~ +40°C
Storage Temperature	-20°C ~ +60°C
Dimension	243mm(L) x 145mm(W) x 163mm(H)
Weight	1.2KG
Color	Grey